


---

# MITNIK Model MT2000 Self Loading Mobile Portable Concrete Mixer For Sale

## MITNIK MOBILE SELF LOADING CONCRETE BATCHING PLANT

MITNIK MT2000 Self-loading Mobile Concrete Mixer drum capacity 2.7 M3. Concrete output: 2.0 M3 per batch. Drum rotation by hydraulic motor and planetary reducers. Discharging by reversing drum. The mixing unit is slewing hydraulically through 0° for high discharge over 1.1 m. Double mixing screws, cover for emergency unloading. Drum rotation by hydraulic motor and planetary reducers. Mixing and discharging speed independent from r.p.m. of diesel engine. Discharging by reversing drum. The mixing unit is slewing hydraulically through 270° for high discharge over 1.8 m to the four sides of the vehicle.

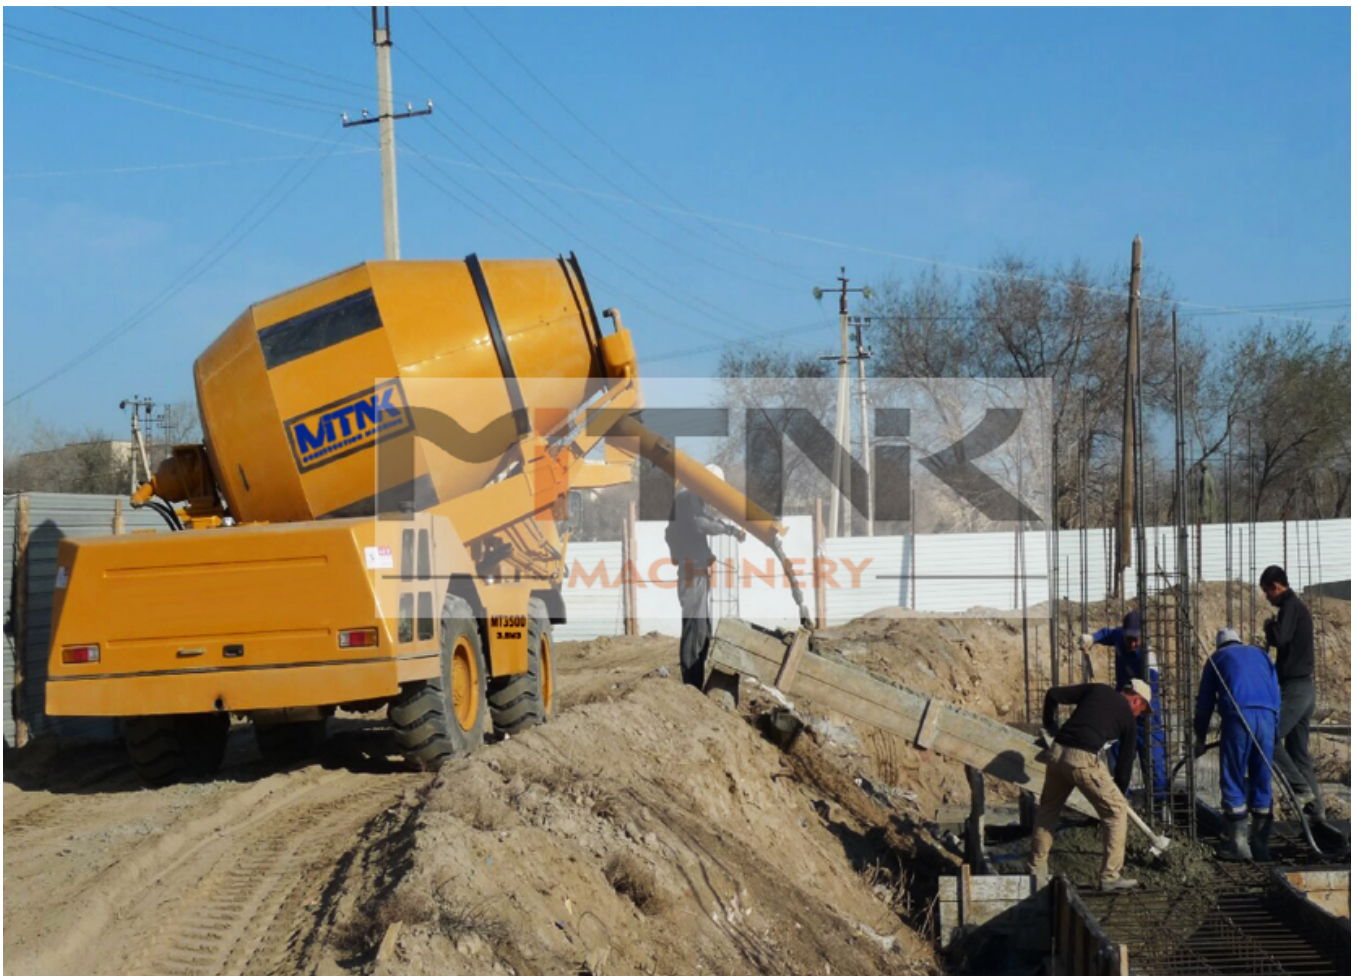

MITNIK MT-2000 Mobile Self-Loading Concrete Mixer Features:

---

MT2000

Product Name: Mobile self-loading concrete mixer/concrete batching plant

4X4X2 concrete mixer









Reliable, high-performance














Drum capacity: 2.7m<sup>3</sup>

Output: 2.0m<sup>3</sup>



MT-2000 Mobile Self-Loading Concrete Mixer Specification

	MIXING UNIT	Drum capacity 2.7 M3. Concrete output: 2.0 M3 per batch. Drum rotation by hydraulic motor and planetary reducers. Mixing and discharging speed independent from r.p.m. of diesel engine. Discharging by reversing drum. The mixing unit is slewing hydraulically through 0° for high discharge over 1.1 m.
	ENGINE	Xinchai A498 ,diesel,water-cooled,42kw/2200rpm
	TRANSMISSION	Full hydraulic driving. 4 wheel drive and 2 wheel steering.Hydraulic Pump and motor are connected to the differentials through reducer. 4X4X2
	SPEED	Working speed from 0 to 10 km/h, road transfer from 0 to 20 km/h
	DRIVING SEAT	Front cab on side of loading shovel.
	HYDRAULIC SYSTEM	One Hydraulic torque converter for walk ,3 gear pumps for drum rotation and services. Inlet and outlet filter. Heat exchanger water/oil-air type.
	JOYMIX	All hydraulic functions of shovel controlled by a single - fully servo controlled Joystick.
	LOADING SHOVEL	Capacity 270 liters, complete with hydraulic opening gate.

	CHUTE	Slewing. Fitted with two pins easily detachable to increase the discharge height.
	WATER SYSTEM	Self-contained. Hydraulic driven water pump, water meter. High pressure water pump & washing gun
	GRADIENT	Fully loaded 30%
	BRAKES	Hydraulic brakes,Twin independent circuits. Hydraulic parking brake
	TYRES	Construction tyres 12-16.5
	STEERING	Hydraulic. 1way steering.
	ELECTRIC SYSTEM	24V. Safety battery cut-off.
	TANKS	Water: 2x350 liters. Diesel: 165 liters. Hydraulic oil: 150 liters.
	CHASSIS	Steel profile specially engineered for off-road operations.
	OVERALL DIMENSIONS	Length 5.1m width 2.2m height:2.3m
	WEIGHT	4800kgs, equally distributed on both axles
	SAFETY	Machine equipped with checking and block valves for maximum safety of the operator.
	MEASURING SYSTEM	Water meter . no electronic weighing system.

Product link : <https://www.mitnikmachine.com/?p=2036>